

L3.

### Lindblad master equation

$$\frac{dS}{dt} = -\frac{i}{\hbar} [H, S] + \sum_j \left( L_j S L_j^\dagger - \frac{1}{2} \{ L_j^\dagger L_j, S \} \right)$$

Spontaneous emission, relaxation

$$L = \sqrt{\gamma} G_-$$

$$H_0 = \frac{\hbar \omega_0}{2} G_z$$

$$\begin{aligned} \frac{d}{dt} \begin{pmatrix} S_{00} & S_{01} \\ S_{10} & S_{11} \end{pmatrix} &= -i \omega_0 \begin{pmatrix} 0 & S_{01} \\ -S_{10} & 0 \end{pmatrix} \\ &\quad + \gamma \begin{pmatrix} S_{11} & -\frac{1}{2} S_{01} \\ -\frac{1}{2} S_{10} & -S_{11} \end{pmatrix} \end{aligned}$$

✓  $S_{00}(t) = S_{00}(0) + S_{11}(0) [1 - e^{-\gamma t}]$

$$S_{11}(t) = S_{11}(0) e^{-\gamma t}$$

$$S_{01}(t) = S_{01}(0) e^{i\omega_0 t} e^{-\gamma t/2}$$

$$S_{10}(t) = S_{10}(0) e^{-i\omega_0 t} e^{-\gamma t/2}$$



$$L3,2 \quad S_z(t) = \langle z \rangle = \text{tr} (S G_z) = S_{zz} - S_{11}$$

$$S_z(t) = S_z(0) e^{-\gamma t} + (1 - e^{-\gamma t})$$

$$S_x(t) = S_x(0) \cos(\omega_0 t) e^{-\gamma t/2}$$

$$S_y(t) = S_y(0) \sin(\omega_0 t) e^{-\gamma t/2}$$

Larmor precession

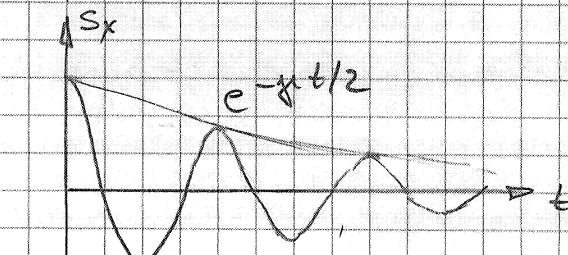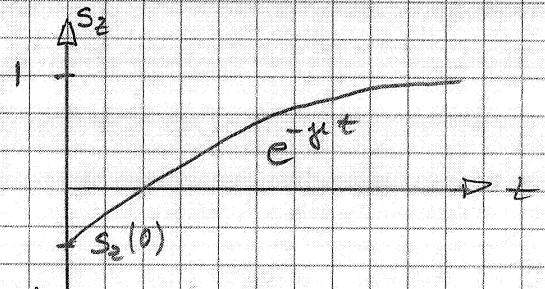

L3.3

### How to measure relaxation time

~  $\pi$ -pulse




~ resonance  
frequency  
of qubit  $w_0$

$\Delta t$

measurement

measurement is repeated many times

$$\frac{N_{10\rangle} - N_{11\rangle}}{N_{10\rangle} + N_{11\rangle}}$$

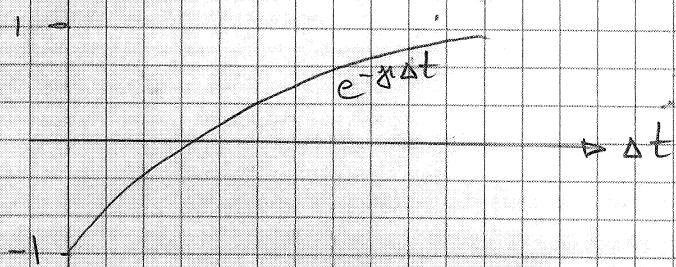

$N_{10\rangle}$  number of times measurement  
resulted  $|10\rangle$

$N_{11\rangle}$  ...  $|11\rangle$

## Dephasing

$$L_r = \sqrt{\gamma_r} G_z$$

$$L_\varphi = \sqrt{\gamma_\varphi} G_z$$

$$H_0 = \frac{\hbar \omega_0}{2} G_z$$

$$\frac{d}{dt} \begin{pmatrix} S_{00} & S_{01} \\ S_{10} & S_{11} \end{pmatrix} = i\omega_0 \begin{pmatrix} 0 & S_{01} \\ -S_{10} & 0 \end{pmatrix} + \gamma_r \begin{pmatrix} S_{11} - \frac{1}{2} S_{01} \\ -\frac{1}{2} S_{10} - S_{11} \end{pmatrix} + \gamma_\varphi \begin{pmatrix} 0 & -2S_{01} \\ -2S_{10} & 0 \end{pmatrix}$$

$$S_{00}(t) = S_{00}(0) + S_{11}(0) \left[ 1 - e^{-t/T_1} \right]$$

$$S_{11}(t) = S_{11}(0) e^{-t/T_1}$$

$$S_{01}(t) = S_{01}(0) e^{i\omega_0 t} e^{-t/T_2}$$

$$S_{10}(t) = S_{10}(0) e^{i\omega_0 t} e^{-t/T_2}$$

$$\frac{1}{T_1} = \gamma_r \quad \text{relaxation time}$$

$$\frac{1}{T_2} = \frac{1}{2} \gamma_r + 2 \gamma_\varphi \quad \text{dephasing time}$$

13.5

$$\frac{1}{T_2} = 2 \mu_0 + \frac{1}{2} \frac{1}{T_1}$$

$$T_2 = 2 T_1$$



$$\frac{d}{dt} S_z = - \frac{(S_z - 1)}{T_1}$$

$$\frac{d}{dt} S_x = -\omega_0 S_y - \frac{S_x}{T_2}$$

$$\frac{d}{dt} S_y = +\omega_0 S_x - \frac{S_y}{T_2}$$

Bloch equations

## Ramsey Fringe

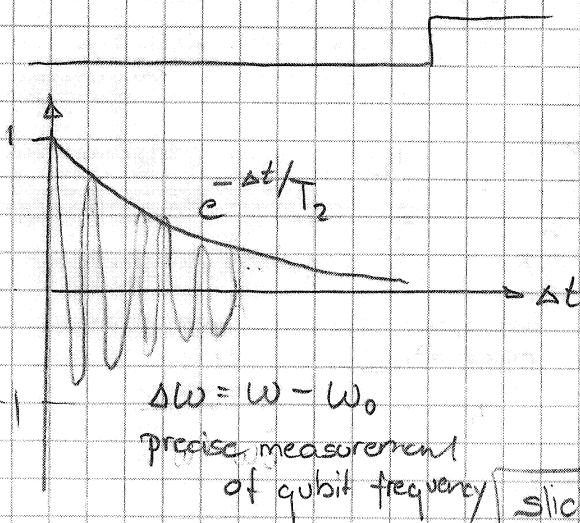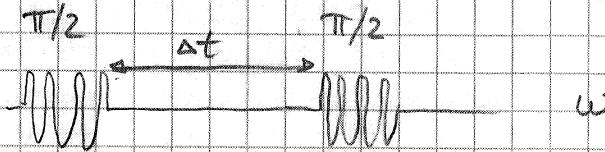

$$\Delta \omega = \omega - \omega_0$$

precise measurement  
of qubit frequency

slices


## Rabi Oscillations

$$H = \frac{\hbar}{2} \begin{pmatrix} w_0 & w_1 e^{-i\omega t} \\ w_1 e^{+i\omega t} & -w_0 \end{pmatrix}$$

$$[H, S] =$$

$$\begin{pmatrix} w_1 (S_{10} e^{-i\omega t} - S_{01} e^{i\omega t}) & S_0 w_0 + e^{-i\omega t} w_1 (S_{11} - S_{00}) \\ -S_{10} w_0 + e^{i\omega t} w_1 (S_{00} - S_{11}) & w_1 (S_{01} e^{i\omega t} - S_{10} e^{-i\omega t}) \end{pmatrix}$$


$$L(\omega) = \frac{\omega_1^2}{(\Delta\omega)^2 + \omega_1^2 + \left(\frac{1}{T_2}\right)^2}$$




$\Delta FWHM^2$

$$\left(\frac{1}{T_2}\right)^2$$

$\omega_1^2$   
driving strength

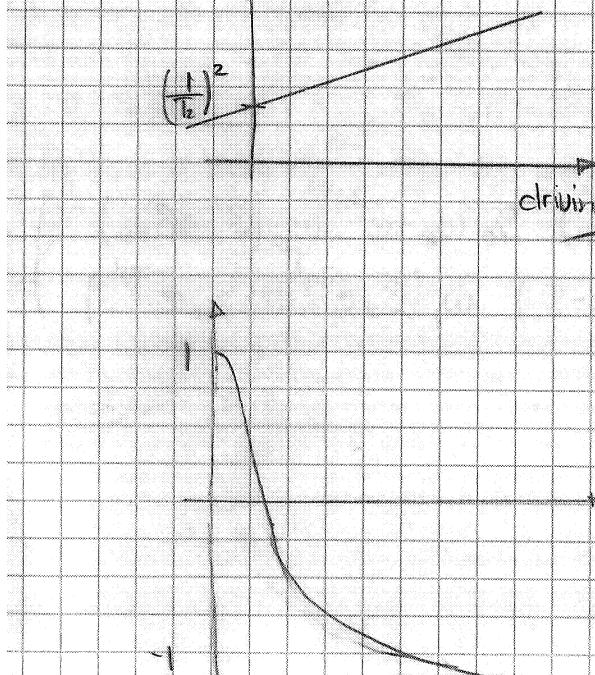

## Hahn Echo

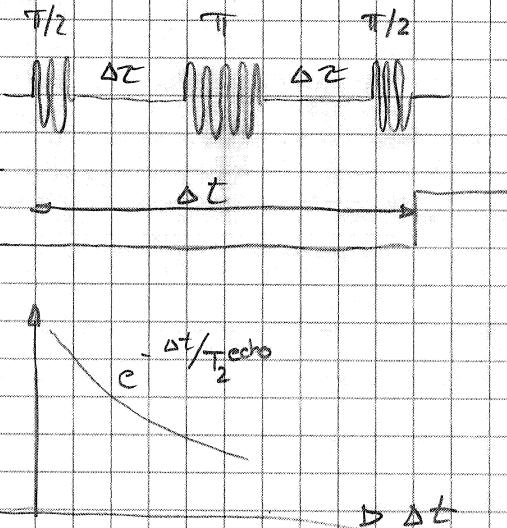

slice

$$\frac{1}{T_2^{\text{ramsey}}} = \frac{1}{T_2} + \frac{1}{T_2^{\text{inhomogenous}}}$$

$$\frac{T_2^{\text{ramsey}}}{T_2} / \frac{T_2^{\text{echo}}}{T_2}$$