

Legendre Transformation

$$E(q_i, q_j) = \frac{Q_i^2}{2C_i} + \frac{Q_j^2}{2C_j} \quad \text{extensive variables}$$

$$P_j = \frac{\partial E}{\partial Q_j} = \frac{Q_j}{C_j} = V_j \quad \text{intensive variable}$$

$$\begin{aligned} G(q_i, V_j) &= E(q_i, q_j) - P_j q_j \\ &= E - V_j q_j \end{aligned}$$

Cooper-pair box

single electron box: $E_{el} = E_c (n - n_g)^2$

$$E_c = \frac{e^2}{2C_\Sigma}$$

$$n_g = \frac{C_g V_g}{e}$$


Cooper-pair box: $E_{el} = 4 E_c (n - n_g)^2$

$$E_c = \frac{e^2}{2C_\Sigma}$$

$$n_g = \frac{C_g V_g}{2e}$$

Hamilton Function

$$\hat{H} = 4 E_c (n - n_g)^2 - E_J \cos(\varphi)$$

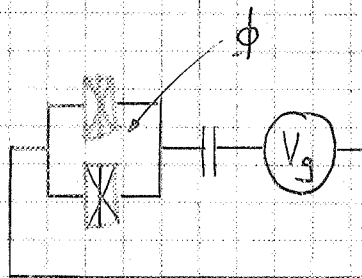

$$E_J = E_J^{\max} |\cos(\pi \phi / \phi_0)| \quad \phi = \frac{n}{2e}$$

quantizing the circuit

$$\tilde{H}_{el} = 4 E_c \sum_n (n - n_g)^2 |n\rangle \langle n|$$

charge base $|n\rangle$

$$n = \dots, -1, 0, 1, \dots$$

$$\tilde{n} |n\rangle = n |n\rangle$$

$$\tilde{H}_J = -E_J \cos(\tilde{\varphi})$$

commutation relation $[\tilde{\varphi}, \tilde{N}] = i$

Phase base $|4\rangle = \frac{1}{\sqrt{2\pi}} \sum_n e^{in\varphi} |n\rangle$

$$\cos(\tilde{\varphi}) = \frac{1}{2} (e^{i\tilde{\varphi}} + e^{-i\tilde{\varphi}})$$

$$e^{i\tilde{\varphi}} |n\rangle = |n+1\rangle$$

$$e^{-i\tilde{\varphi}} |n\rangle = |n-1\rangle$$

$$\tilde{H}_J = -\frac{E_J}{2} \left(\sum_n |n\rangle \langle n+1| + |n+1\rangle \langle n| \right)$$

$$\tilde{H} = \tilde{H}_{H_0} + \tilde{H}_J$$

$$\tilde{H} |4_n\rangle = E_n |4_n\rangle$$

$$\tilde{H} =$$

$$4E_c(-1-n_g)^2 - E_J/2$$

$$- E_J/2$$

$$4E_c n_g^2$$

$$- E_J/2$$

$$- E_J/2$$


$$4E_c(1-n_g)^2$$

$$- E_J/2$$

$$- E_J/2$$

$$4E_c(2-n_g)^2$$

nearly free electron approximation $E_J \ll E_C$



phase base

$$\tilde{H} = -i \frac{\partial}{\partial \varphi}$$

$$\tilde{H} = 4E_C \left(-i \frac{\partial}{\partial \varphi} - n_g \right)^2 - E_J \cos(\varphi)$$

second order differential equation

Mathieu differential equation

periodic potential \Rightarrow Bloch bands

quasi-momentum corresponds to
gate charge

Cooper-pair box qubit

restrict to $0 < n_g < 1$

E_J not too large

zero energy $E_0 = 2E_c(1-2n_g)^2$


$$E_{ch} := 4E_c(1-2n_g)$$

restrict to $|0\rangle, |1\rangle$

$$H = -\frac{1}{2} \begin{pmatrix} E_{ch} & E_J \\ E_J & -E_{ch} \end{pmatrix} = -\frac{1}{2} E_{ch} \sigma_z - \frac{1}{2} E_J \sigma_x$$

$$E_{\pm} = \pm \frac{1}{2} \sqrt{E_{ch}^2 + E_J^2} = \pm \frac{1}{2} \sqrt{16E_c^2(1-2n_g)^2 + E_J^2}$$

$$\Delta E = E_+ - E_- = \sqrt{16E_c^2(1-2n_g)^2 + E_J^2}$$

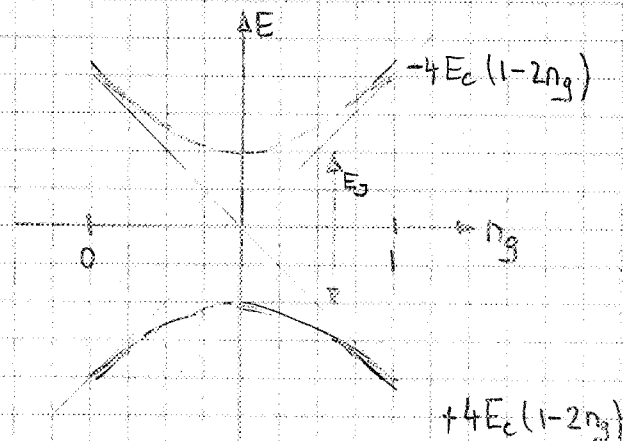

$$|4_+\rangle = \cos\left(\frac{\theta}{2}\right) |1\rangle - \sin\left(\frac{\theta}{2}\right) |0\rangle$$

$$|4_-\rangle = \cos\left(\frac{\theta}{2}\right) |1\rangle + \sin\left(\frac{\theta}{2}\right) |0\rangle$$

mixing angle $\tan(\theta) = \frac{E_{ch}}{E_J}$

$$\langle n \rangle_{\text{ground state}} = \frac{1}{2} \left(1 - \frac{1-2n_g}{\sqrt{\left(\frac{E_2}{4E_0}\right)^2 + (1-2n_g)^2}} \right)$$

